
SECTION 1.

PRODUCT INFORMATION

Thanks for purchasing BXAD Dual Pentium II mainboard.

This user's manual contains all the information and features that show you how to use the BXAD mainboard. Please take a moment to familiarize yourself with the design and organization of this manual.

1-1 Manual Features

This manual is divided into the following four sections:

Section 1: Product Information

A brief overview of what comes in the mainboard package, the mainboard layout and the specification it appears.

Section 2: Hardware Installation

Tell you the usage of the mainboard jumpers and the connectors.

Section 3: CMOS Setup Utility

A summary of the mainboard CMOS (BIOS) Setting.

Section 4: BIOS/Software Utility

Introduction of mainboard BIOS flash utility.

1-2 Package Check List

This BXAD mainboard package contains the following items. Please inspect the package contents and confirm that everything is there. If anything is missing or damaged, call your vendor for instructions before operating.

I. PRODUCT INFORMATION

The package includes:

- One BXAD Mainboard
- Two Pentium II Retention Module
- One Floppy Interface Cable
- One IDE Interface Cable
- One CD Title including Bus Master IDE Driver and Utilities
- One User's Manual

1-3 Mainboard Specification

Form Factor	<ul style="list-style-type: none">● ATX form factor
Board Size	<ul style="list-style-type: none">● 22.86 cm x 30.5 cm
CPU	<ul style="list-style-type: none">● Supports Dual Pentium II CPUs up to 350~450 MHz
System Memory	<ul style="list-style-type: none">● DIMM 168-pin x 4 , SDRAM maximum 1GB● Supports 64M-bit SDRAM technology
Chipset	<ul style="list-style-type: none">● Intel 440BX AGP Chipset
Expansion Slots	<ul style="list-style-type: none">● 1 x AGP bus● 2 x ISA bus● 5 x PCI bus with Bus master mode
Serial Port	<ul style="list-style-type: none">● Two serial ports UART 16C550 compatible● Sets serial port 2 to operate in normal mode , IrDA or ASKIR
Parallel Port	One parallel port supports : <ul style="list-style-type: none">● SPP-standard parallel port● EPP-enhanced parallel port● ECP-extended capabilities port
Floppy Interface	Supports drives inches/format with: <ul style="list-style-type: none">● 3.5 inches—720KB/1.44MB/2.88MB

I. PRODUCT INFORMATION


	<ul style="list-style-type: none">● 5.25 inches—360KB/1.2MB
IDE Interface	<ul style="list-style-type: none">● Dual PCI IDE interface support up to 4 x IDE HDD or CDROM● Supports PIO mode 4 , DMA mode 2 and Ultra DMA 33
USB Interface	<ul style="list-style-type: none">● Two USB ports supported● USB legacy keyboard function supported
PS/2 Mouse	<ul style="list-style-type: none">● PS/2 mouse supported by connector onboard
Keyboard	<ul style="list-style-type: none">● PS/2 keyboard by connector onboard
Fuse	<ul style="list-style-type: none">● Supports recoverable fuse for USB and KB / MOUSE
RTC and Battery	<ul style="list-style-type: none">● RTC build in chipset (south bridge PIIX4)● Lithium (CR-2032) battery
Wake up function	<ul style="list-style-type: none">● Modem ring wake up● LAN wake up● RTC Alarm wake up
Synchronous Switching Regulator	<ul style="list-style-type: none">● High efficient synchronous switching regulator for CPU core voltage from 2.0V to 3.5V● Supports over-voltage / over-current protection function
Hardware Monitor (Optional)	<ul style="list-style-type: none">● Fan speed monitor--Three fan connectors , warning when CPU or Housing fan is malfunction● Voltage monitor—Warning when system voltage (5V,12V,3.3V,VCORE) are abnormal● CPU and system thermal monitor—Warning when CPU and system temperature is higher than a predefined value
Power connector	<ul style="list-style-type: none">● Supports ATX(20-pin) power connector
BIOS	<ul style="list-style-type: none">● Award BIOS● Year 2000 Compliance● PCI 2.1 Compliance● PnP BIOS v1.0a Compliance● APM v1.2 Compliance

I. PRODUCT INFORMATION

	<ul style="list-style-type: none">● DMI 2.0 compliance● Flash/Upgrade BIOS protection● Supports ACPI (Advanced Configuration and Power Interface) and OS Directed Power Management● Supports SOFT power● Virus warning supported● Floppy drive swapping function supported
LED Indicator	<ul style="list-style-type: none">● System power LED● HDD activity LED
SB-Link Connector	<ul style="list-style-type: none">● Supports Creative PCI sound card

1-4 Mainboard Layout

I. PRODUCT INFORMATION

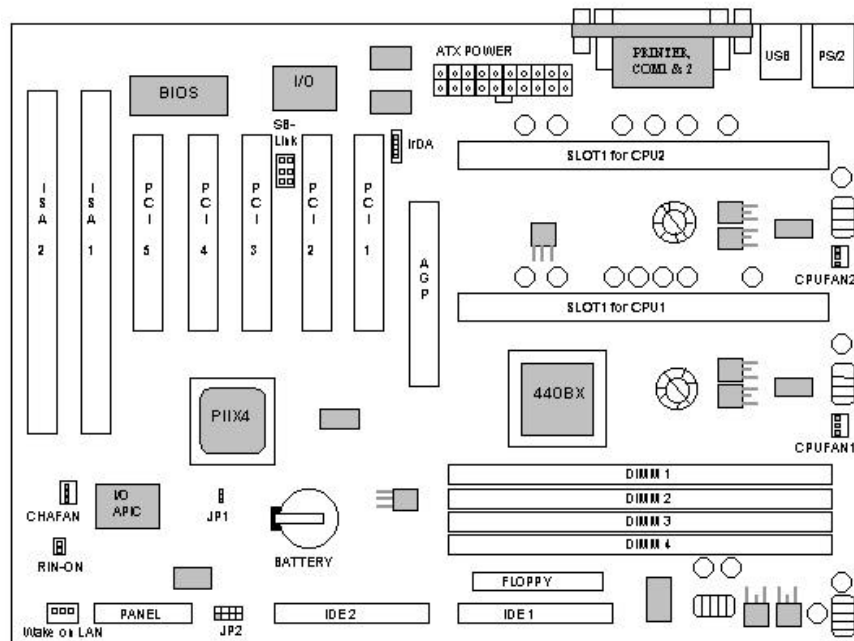

Jumpers

1. **JP1** Clear CMOS (Real Time Clock)
2. **JP2** CPU Clock Ratio & CPU Type

Expansion Sockets

1. **DIMM 1 to DIMM 4** Support DIMM Memory

I. PRODUCT INFORMATION

Expansion Slots

- | | |
|-------------------------|--------------------------------------|
| 1. CPU1 | Slot 1 for supporting Pentium II CPU |
| 2. CPU2 | Slot 1 for supporting Pentium II CPU |
| 3. ISA Slot 1 & Slot 2 | 16-bit ISA Bus Expansion Slot |
| 4. PCI Slot 1 to Slot 5 | 32-bit PCI Bus Expansion Slot |

Connectors

- | | |
|-------------------|--|
| 1. PS/2 KB | PS/2 Keyboard Connector (6-pin female) |
| 2. PS/2 Mouse | PS/2 Mouse Connector (6-pin female) |
| 3. USB | Universal Serial BUS Port 1 and Port 2
(two 4-pin female) |
| 4. COM1/COM2 | Serial Port 1 / Serial Port 2 (two 9-pin female) |
| 5. PRINTER | Printer (Parallel) Port Connector (25-pin female) |
| 6. ATX POWER | ATX Mainboard Power Connector (20-pin block) |
| 7. CPUFAN1 | Pentium II CPU 1 Fan Connector (3 pins) |
| 8. CPUFAN2 | Pentium II CPU 2 Fan Connector (3 pins) |
| 9. CHAFAN | Chassis Fan Connector (3 pins) |
| 10. Floppy | Floppy Drive Connector (34 pins) |
| 11. Primary IDE | Primary IDE Connector (40 pins) |
| 12. Secondary IDE | Secondary IDE Connector (40 pins) |
| 13. IR | Infrared Port Connector (5 pins) |
| 14. RIN-ON | Internal Modem Ring-On |
| 15. SB-LINK | Creative PCI Sound Card Link |
| 16. Panel: | |
| - PWR LED | ATX Power LED Connector (3 pins) |
| - KBLCK | Keyboard Lock Switch Connector (2 pins) |
| - SLP | Suspend Switch Connector (2 pins) |
| - SPEAKER | Chassis Speaker Connector (4 pins) |
| - GRN LED | Green Status LED Connector (3 pins) |
| - HDD LED | HDD LED Connector (4 pins) |
| - RESET | Reset Switch Connector (2 pins) |
| - PWR ON | ATX Power Switch Connector (2 pins) |

I. PRODUCT INFORMATION
