


ATX686 - 440FX PENTIUM PRO ATX BOARD

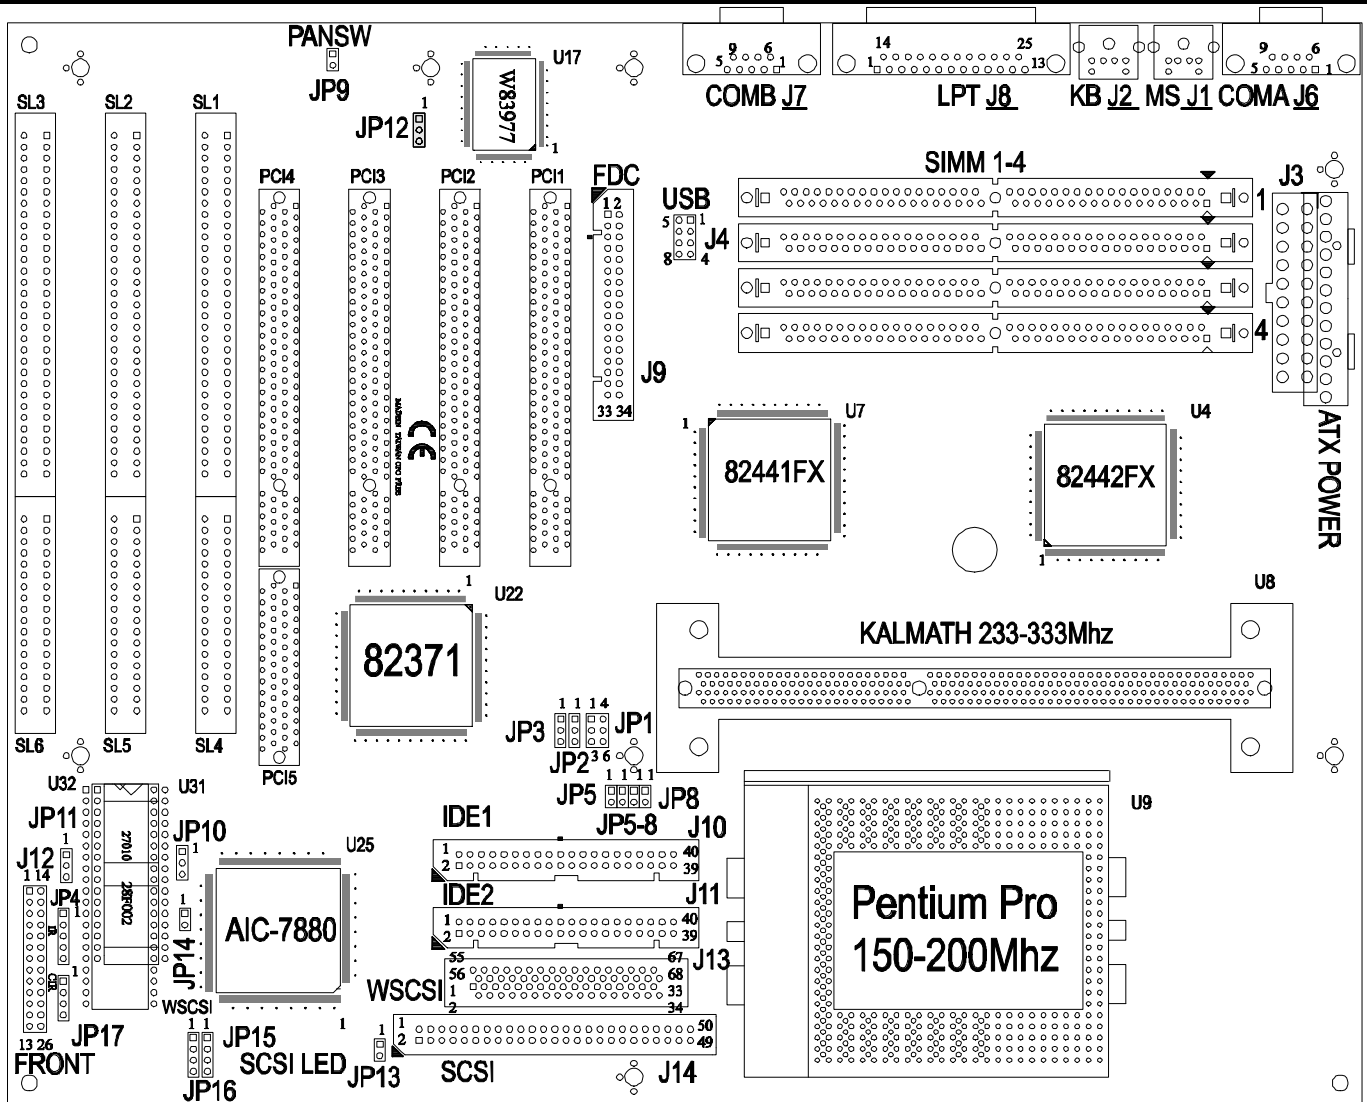

Specifications:

- ✓ Intel 440FX NATOMA PCI CHIPSET
- ✓ ATX form factor VRM and SCSI built-in
- ✓ Support Klamath 233-333Mhz, Pentium Pro 150-200Mhz
- ✓ 1.3 to 3.5V 15A VRM 5bits on board
- ✓ 4pcs 32 bits PCI, 3pcs 16 bits ISA
- ✓ 4pcs 32 bits SIMM, 2 banks
- ✓ 2 ports EIDE, USB, RS232
- ✓ 1port FDD, IR, LPT, PS/2 MOUSE

FEATURES

- ❑ Optimal design layout, 245*305mm
- ❑ Optimized for Klamath, Pentium Pro, overdrives
- ❑ Powerful expansion
- ❑ Large memory support
- ❑ Safety operation
- ❑ Adaptec 7880 Ultra SCSI
- ❑ SCSI expansion

BENEFITS

- ➡ Standard ATX size, built-in VRM support low thermal dissipation
- ➡ Klamath 233-333Mhz, Pentium Pro P6 150-200Mhz, P6S, and P6T CPU
- ➡ 4*PCI 32bits, 3*ISA 16bits
- ➡ 2*banks, 4*SIMM, FP, EDO, BEDO, 8MB to 512MB
- ➡ Heat device with big size cooling to low temperature for long time operation
- ➡ AHA2940UW on board
- ➡ Adaptec RAID port support

TAKEN CORP. 5FL, NO. 30, LANE 80, SEC 3, NAN KANG RD, TAIPEI, TAIWAN, R.O.C.

TEL: 886-2-788 6071 (HUNTING) FAX: 886-2-788 6073/785 4925

e-mail: take0626@ms9.hinet.net. URL: http://www.taken.com.tw/